

# Mapress Stainless Steel Gas


---



	Description
<b>Mapress fittings</b>	• Couplings → Page 158
	• Bends → Page 158
	• Reducers → Page 160
	• T-pieces → Page 160
	• Adapters → Page 163
	• Connectors → Page 165
	• Flanges → Page 166
	• Closures → Page 167
	<b>Mapress accessories</b>

## Couplings

### Coupling



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C


#### Scope Of Delivery

- Seal rings HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	L [cm]	Z [cm]
34101	15	4,8	0,8
34102	18	4,8	0,8
34103	22	5	0,8
34104	28	5,4	0,8
34105	35	6,2	1
34106	42	7,1	1,1
34107	54	8,3	1,3
34248	76,1	14,1	3,5
34249	88,9	16,2	4,2
34250	108	19,4	4,4

### Slip coupling



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C

#### Scope Of Delivery


- Seal rings HNBR yellow

### Ordering Information

Article no.	dØ [mm]	E [cm]	L [cm]
34108	15	2,5	8
34109	18	2,5	8
34110	22	2,5	8,4
34111	28	3	9,1
34112	35	3	10,2
34113	42	4	12
34114	54	4	14
34162	76,1	6	23
34121	88,9	7	26
34122	108	8	31

## Bends

### Bend 90°



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

#### Scope Of Delivery


- Seal rings HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	L [cm]	Z [cm]
34000	15	4,9	2,9
34001	18	5,3	3,3
34002	22	6,1	4
34003	28	7,2	4,9
34187	35	6,8	4,2
34188	42	8	5
34189	54	10	6,5
34441	76,1	15,3	10
34442	88,9	17,9	11,9
34443	108	22,2	14,7

Bends

**Bend 90° with plain end**

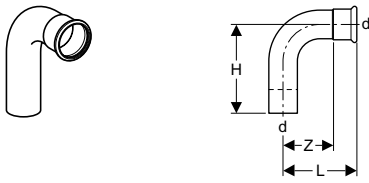

**Application Purpose**

- For gas installations with natural gases (NG) and liquefied gases (LPG)

**Characteristics**

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Plain end

**Product Details**

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°


**Scope Of Delivery**

- Seal ring HNBR yellow

**Ordering Information**

Article no.	dØ [mm]	H [cm]	L [cm]	Z [cm]
34007	15	5,9	4,9	2,9
34008	18	6,1	5,3	3,3
34009	22	7	6,1	4
34010	28	7,9	7,2	4,9
34190	35	7,7	6,8	4,2
34191	42	9	8	5
34192	54	11,1	10	6,5
34444	76,1	16,6	15,3	10
34445	88,9	19,4	17,9	11,9
34446	108	24	22,2	14,7

**Bend 45°**

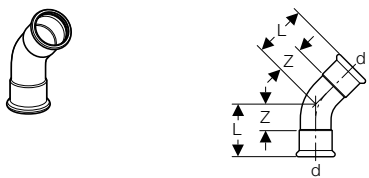

**Application Purpose**

- For gas installations with natural gases (NG) and liquefied gases (LPG)

**Characteristics**

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

**Product Details**

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	45°


**Scope Of Delivery**

- Seal rings HNBR yellow

**Ordering Information**

Article no.	dØ [mm]	L [cm]	Z [cm]
34014	15	3,6	1,6
34015	18	3,7	1,7
34016	22	4,2	2,1
34017	28	4,8	2,5
34193	35	4,3	1,7
34194	42	5,1	2,1
34195	54	6,2	2,7
34447	76,1	9,7	4,4
34448	88,9	11,2	5,2
34449	108	13,9	6,4

**Bend 45° with plain end**

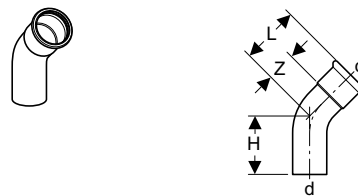

**Application Purpose**

- For gas installations with natural gases (NG) and liquefied gases (LPG)

**Characteristics**

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Plain end

**Product Details**

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	45°

**Scope Of Delivery**

- Seal ring HNBR yellow


**Ordering Information**

Article no.	dØ [mm]	H [cm]	L [cm]	Z [cm]
34021	15	4,5	3,6	1,6
34022	18	4,2	3,7	1,7
34023	22	5,2	4,2	2,1
34024	28	5,6	4,8	2,5
34196	35	5,3	4,3	1,7
34197	42	6,1	5,1	2,1
34198	54	7,3	6,2	2,7
34450	76,1	11,1	9,7	4,4
34451	88,9	13	11,2	5,2
34452	108	15,7	13,9	6,4



## Reducers

### Reducer with plain end

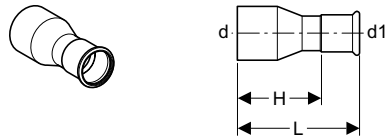

#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Plain end

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C

#### Scope Of Delivery


- Seal ring HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	d1Ø [mm]	H [cm]	L [cm]
34115	18	15	3,5	5,5
34116	22	15	3,9	5,9
34117	22	18	3,7	5,7
34118	28	15	4,6	6,6
34119	28	18	4,4	6,4
34120	28	22	3,9	6
34123	35	22	5	7,1
34124	35	28	4,5	6,8
34128	42	28	6	8,3
34129	42	35	5,1	7,7
34133	54	28	8,7	11
34134	54	35	8	10,6
34135	54	42	6,2	9,2
34296	76,1	54	11,1	14,6
34297	88,9	54	12,8	16,3
34298	88,9	76,1	10,8	16,1
34259	108	54	13,7	17,2
34260	108	76,1	13,1	18,4
34261	108	88,9	14,3	20,3

## T-pieces

### T-piece equal

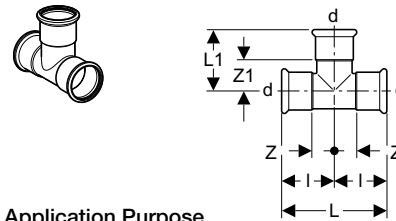

#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°


#### Scope Of Delivery

- Seal rings HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]
34028	15	6,4	3,9	3,2	1,2	1,9
34029	18	6,8	4,1	3,4	1,4	2,1
34030	22	7,4	4,4	3,7	1,6	2,3
34031	28	8,4	5	4,2	1,9	2,7
34032	35	10	5,7	5	2,4	3,1
34033	42	11,4	6,5	5,7	2,7	3,5
34034	54	13,8	7,7	6,9	3,4	4,2
34285	76,1	23	11	11,5	6,2	5,7
34286	88,9	26	12,8	13	7	6,8
34287	108	31	15,3	15,5	8	7,8

T-piece reduced



Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

Scope Of Delivery


- Seal rings HNBR yellow

Ordering Information

Article no.	dØ [mm]	d1Ø [mm]	d2Ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]
34035	18	15	18	6,8	4,1	3,4	3,4	1,4	2,1	1,4
34036	22	15	22	7,4	4,3	3,7	3,7	1,6	2,3	1,6
34037	22	18	22	7,4	4,3	3,7	3,7	1,6	2,3	1,6
34038	28	15	28	8,4	4,6	4,2	4,2	1,9	2,6	1,9
34039	28	18	28	8,4	4,6	4,2	4,2	1,9	2,6	1,9
34040	28	22	28	8,4	4,7	4,2	4,2	1,9	2,6	1,9
34041	35	15	35	10	4,9	5	5	2,4	2,9	2,4
34042	35	18	35	10	4,9	5	5	2,4	2,9	2,4
34043	35	22	35	10	5	5	5	2,4	2,9	2,4
34044	35	28	35	10	5,3	5	5	2,4	3	2,4
34045	42	22	42	11,4	5,4	5,7	5,7	2,7	3,3	2,7
34046	42	28	42	11,4	5,7	5,7	5,7	2,7	3,4	2,7
34047	42	35	42	11,4	6,1	5,7	5,7	2,7	3,5	2,7
34048	54	22	54	13,8	6	6,9	6,9	3,4	3,9	3,4
34049	54	28	54	13,8	6,3	6,9	6,9	3,4	4	3,4
34050	54	35	54	13,8	6,7	6,9	6,9	3,4	4,1	3,4
34051	54	42	54	13,8	7,1	6,9	6,9	3,4	4,1	3,4
34062	new 76,1	22	76,1	23	7,7	11,5	11,5	6,2	5,6	6,2
34065	new 76,1	28	76,1	23	7,9	11,5	11,5	6,2	5,6	6,2
34079	new 76,1	35	76,1	23	8,1	11,5	11,5	6,2	5,5	6,2
34080	new 76,1	42	76,1	23	8,1	11,5	11,5	6,2	5,1	6,2
34097	76,1	54	76,1	23	8,7	11,5	11,5	6,2	5,2	6,2
34081	new 88,9	22	88,9	26	8,5	13	13	7	6,4	7
34082	new 88,9	28	88,9	26	8,7	13	13	7	6,4	7
34085	new 88,9	35	88,9	26	9	13	13	7	6,4	7
34088	new 88,9	42	88,9	26	9,2	13	13	7	6,2	7
34098	88,9	54	88,9	26	9,3	13	13	7	5,8	7
34094	new 108	22	108	31	10,3	15,5	15,5	8	8,2	8
34095	new 108	28	108	31	10,5	15,5	15,5	8	8,2	8
34096	new 108	35	108	31	10,8	15,5	15,5	8	8,2	8
34125	new 108	42	108	31	11	15,5	15,5	8	8	8
34099	108	54	108	31	11,3	15,5	15,5	8	7,8	8



T-piece with female thread



Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Female thread

Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

Scope Of Delivery


- Seal rings HNBR yellow

Ordering Information

Article no.	dØ [mm]	Rp ["]	d1Ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]
34052	15	1/2	15	6,4	4	3,2	3,2	1,2	2,7	1,2
34053	18	1/2	18	6,8	4,2	3,4	3,4	1,4	2,9	1,4
34054	18	3/4	18	6,8	4,4	3,4	3,4	1,4	2,9	1,4
34055	22	1/2	22	7,4	4,3	3,7	3,7	1,6	3	1,6
34056	22	3/4	22	7,4	4,6	3,7	3,7	1,6	3,1	1,6
34057	28	1/2	28	8,4	4,6	4,2	4,2	1,9	3,3	1,9
34058	28	3/4	28	8,4	4,9	4,2	4,2	1,9	3,4	1,9
34059	35	1/2	35	10	5	5	5	2,4	3,7	2,4
34060	35	3/4	35	10	5,3	5	5	2,4	3,8	2,4
34061	42	1/2	42	11,4	5,3	5,7	5,7	2,7	4	2,7
34063	54	1/2	54	13,8	5,9	6,9	6,9	3,4	4,6	3,4
34264	54	3/4	54	13,8	6,2	6,9	6,9	3,4	4,7	3,4
34265	54	2	54	13,8	7,9	6,9	6,9	3,4	5,6	3,4
34266	76,1	3/4	76,1	23	7,9	11,5	11,5	6,2	6,4	6,2
34267	76,1	2	76,1	23	8,9	11,5	11,5	6,2	6,6	6,2
34268	88,9	3/4	88,9	26	8,8	13	13	7	7,3	7
34269	88,9	2	88,9	26	9,6	13	13	7	7,3	7
34270	108	3/4	108	31	10,5	15,5	15,5	8	9	8

**Adapters**

**Adapter with male thread**



**Application Purpose**

- For gas installations with natural gases (NG) and liquefied gases (LPG)

**Characteristics**

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Male thread

**Product Details**

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C


**Scope Of Delivery**

- Seal ring HNBR yellow

**Ordering Information**

Article no.	dØ [mm]	R ["]	H [cm]	L [cm]
34066	15	1/2	2,1	4,1
34067	18	1/2	2,2	4,2
34069	22	1/2	2,1	4,2
34070	22	3/4	2,3	4,4
34346	22	1	2,5	4,6
34068	28	3/4	2,3	4,6
34071	28	1	2,3	4,8
34075	35	1	2,5	5,1
34072	35	1 1/4	2,7	5,3
34076	35	1 1/2	2,7	5,3
34073	42	1 1/2	2,7	5,7
34074	54	2	5,4	8,9
34077	76,1	2 1/2	7	12,3
34078	88,9	3	7,7	13,7

**Adapter with female thread**



**Application Purpose**

- For gas installations with natural gases (NG) and liquefied gases (LPG)

**Characteristics**

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Female thread

**Product Details**

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C


**Scope Of Delivery**

- Seal ring HNBR yellow

**Ordering Information**

Article no.	dØ [mm]	Rp ["]	L [cm]	Z [cm]
34083	15	1/2	3,7	0,4
34084	18	1/2	3,7	0,4
34086	22	1/2	3,6	0,2
34087	22	3/4	3,9	0,3
34347	22	1	4,2	0,4
34089	28	1	4,4	0,4
34093	35	1	4,5	0,2
34090	35	1 1/4	4,9	0,4
34091	42	1 1/2	5,3	0,4
34092	54	2	6,2	0,4

**Elbow adapter 90° with male thread**



**Application Purpose**

- For gas installations with natural gases (NG) and liquefied gases (LPG)

**Characteristics**

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Male thread

**Product Details**

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

**Scope Of Delivery**


- Seal ring HNBR yellow

**Ordering Information**

Article no.	dØ [mm]	R ["]	H [cm]	L [cm]	Z [cm]
34149	15	1/2	3,7	5,7	3,7
34150	18	1/2	3,9	5,7	3,7
34151	22	3/4	4,6	6	3,9
34152	28	1	5,4	6,7	4,4
34153	35	1 1/4	6,3	7,5	4,9



### Elbow adapter 90° with female thread

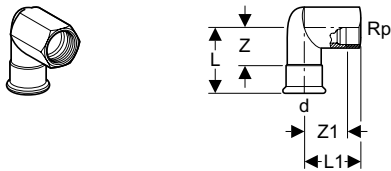

#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Female thread

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

#### Scope Of Delivery

- Seal ring HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]
34144	15	1/2	5,7	3,7	3,7	2,4
34145	18	1/2	5,7	3,9	3,7	2,6
34146	22	3/4	6	4,6	3,9	3,1
34147	28	1	6,7	5,4	4,3	3,7
34148	35	1 1/4	7,5	6,3	4,9	4,4

### Adapter union with male thread



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Male thread
- Union nut made of stainless steel
- Flat sealed

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C


#### Scope Of Delivery

- Seal ring HNBR yellow
- HNBR flat gasket yellow

### Ordering Information

Article no.	dØ [mm]	R ["]	G ["]	H [cm]	L [cm]
34430	15	1/2	3/4	4,4	6,4
34431	15	3/4	3/4	4,6	6,6
34432	18	1/2	3/4	4,4	6,4
34433	18	3/4	3/4	4,6	6,6
34434	22	1/2	1	4,6	6,7
34435	22	3/4	1	4,7	6,8
34436	22	1	1	5,2	7,3
34437	28	1	1 1/4	5,5	7,8
34438	35	1 1/4	1 1/2	5,9	8,5
34439	42	1 1/2	1 3/4	6	9
34440	54	2	2 3/8	6,8	10,3

### Adapter union with female thread

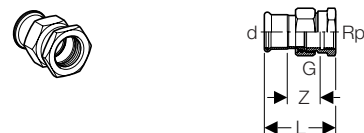

#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Female thread
- Union nut made of stainless steel
- Flat sealed

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C


#### Scope Of Delivery

- Seal ring HNBR yellow
- HNBR flat gasket yellow

#### Ordering Information

Article no.	dØ [mm]	Rp ["]	G ["]	L [cm]	Z [cm]
34400	15	1/2	3/4	5,9	2,6
34401	15	3/4	3/4	6,1	2,6
34402	18	1/2	3/4	5,9	2,6
34403	18	3/4	3/4	6,1	2,6
34404	22	3/4	1	6,3	2,7
34405	22	1	1	6,6	2,8
34406	28	1	1 1/4	7,1	3,1
34407	35	1 1/4	1 1/2	7,7	3,2
34408	42	1 1/2	1 3/4	8,2	3,3
34409	54	2	2 3/8	9,5	3,7

### Adapter with union nut



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Union nut made of stainless steel
- Conical seal

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C



#### Scope Of Delivery

- Seal ring HNBR yellow
- O-ring HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	G ["']	L [cm]	Z [cm]
34156	15	7/8	3,3	0,9
34158	22	1 1/8	4,2	1,6
34161	22	1 3/8	4	1,9
34159	28	1 3/8	4,5	1,7

### Adapter with union nut and plain end



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Leaky if unpressed
- Marked in yellow
- Plain end
- Union nut made of stainless steel
- With holes for sealing

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C



#### Scope Of Delivery

- O-ring HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	G ["']	H [cm]	Z [cm]
34214	28	1 3/8	12,8	2,4

### Adapter for cutting ring connection



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)
- For liquefied gas installations

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Can be used in installations with Mapress Copper Gas

#### Product Details



Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C

#### Ordering Information

Article no.	dØ [mm]	H [cm]	L [cm]	I [cm]
34355	15	6	8	5,1

## Connectors

### Elbow tap connector with female thread



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Female thread
- Can be used in installations with Mapress Copper Gas

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

#### Scope Of Delivery


- Seal ring HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	Rp ["']	L [cm]	L1 [cm]	I [cm]	I1 [cm]	Z [cm]
34136	15	1/2	5	4,3	1,3	1,5	3
34137	18	1/2	5	4,3	1,3	1,5	3
34138	22	3/4	5,4	5,1	1,7	1,6	3,3



### Elbow tap connector for gas metre mounting plate

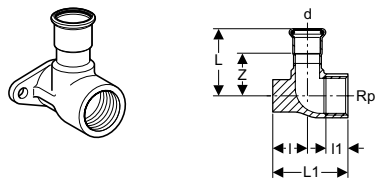

#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)
- For connection single-pipe or two-pipe gas metre
- For mounting plate gas metre connection

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C
Elbow	90°

#### Scope Of Delivery


- Seal ring HNBR yellow

#### Ordering Information

Article no.	dØ [mm]	Rp ["]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	Z [cm]
91097	22	3/4	3,5	5,1	1,7	1,6	1,4
91099	22	1	6,5	5,8	3	2,2	3,7
91098	28	3/4	4,4	6,5	3	1,6	2,1
91100	28	1	6,5	6,1	3	2,2	4

## Flanges

### Flange with pressing socket

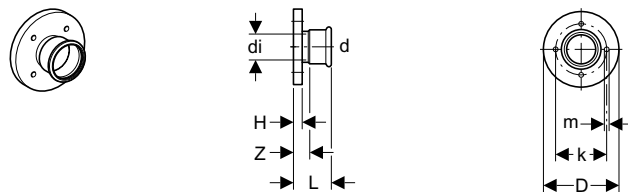

#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator
- Can be used in installations with Mapress Copper Gas

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C


#### Scope Of Delivery

- Seal ring HNBR yellow
- Excluded: Set of bolts for flange
- Excluded: Flange gasket

#### Ordering Information

Article no.	dØ [mm]	diØ [mm]	D [cm]	k [cm]	m [cm]	H [cm]	L [cm]	Z [cm]	PN [bar]
34180	28	25,6	11,5	8,5	1,4	1,4	6,5	3,2	10 / 16
34181	35	32	14	10	1,8	1,5	6,9	3,2	10 / 16
34182	42	39	15	11	1,8	1,6	7,7	3,3	10 / 16
34183	54	51	16,5	12,5	1,8	1,8	8,7	3,4	10 / 16
34184	76,1	72,1	18,5	14,5	1,8	1,8	12,6	3,5	10 / 16
34185	88,9	84,9	20	16	1,8	2	14,3	4,6	10 / 16
34186	108	104	22	18	1,8	2	16,8	4,3	10 / 16

### Flanged stub with plain end for loose flange

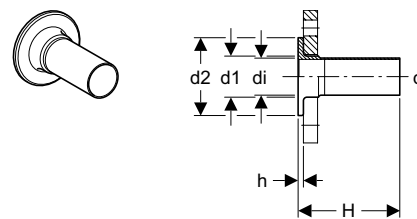

#### Application Purpose

- For loose flange

#### Characteristics

- Plain end

#### Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
------------------	------------------------------------

#### Scope Of Delivery


- Excluded: Loose flange
- Excluded: Set of bolts for flange
- Excluded: Flange gasket

#### Ordering Information

Article no.	dØ [mm]	d2Ø [mm]	diØ [mm]	H [cm]	h [cm]	PN [bar]
36141	22	58	19,6	13,5	0,6	10 / 16
36142	28	68	25,6	13,5	0,6	10 / 16
36143	35	78	32	13,5	0,6	10 / 16
36144	42	88	39	13,5	0,6	10 / 16
36145	54	102	51	13,5	0,8	10 / 16
36146	76,1	122	72,1	13,5	0,8	10 / 16
36147	88,9	138	84,9	13,5	1	10 / 16
36148	108	158	104	13,5	1	10 / 16

## Closures

### Cap



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)
- For long-lasting sealing of pipelines

#### Characteristics

- Marked in yellow
- Leaky if unpressed
- With pressing indicator

#### Product Details


Product material	CrNiMo steel 1.4401 (DIN EN 10088)
Operating temperature	-20 – +70 °C

#### Ordering Information

Article no.	dØ [mm]	L [cm]	Z [cm]
34462	15	2,3	0,3
34463	18	2,3	0,3
34464	22	2,4	0,3
34465	28	2,6	0,3
34466	35	2,9	0,3
34467	42	3,3	0,3
34468	54	3,8	0,3

## Accessories

### Mounting plate for gas metre

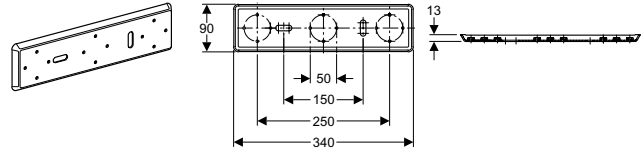

#### Characteristics

- Galvanized

#### Product Details

Product material	Steel
------------------	-------

#### Ordering Information

Article no.	Description
91095	Mounting plate for gas metre

### Seal ring HNBR yellow



#### Application Purpose

- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Product Details

Product material	HNBR
Operating temperature	-20 – +70 °C

#### Ordering Information

Article no.	dØ [mm]
90452	15
90453	18
90454	22
90455	28
90456	35
90457	42
90458	54
90471	76,1
90472	88,9
90473	108



